

**CSSP-06W-140**

- splash-proof
- frameless design
- WAGO connector 221



EN 54-24:2008
Ref. Nr.: 006-27
ID-Code: SAA-LS27
1438-CPR-XXXX

AUDEMO-SYSTEMS GmbH
Schatzbogen 62 81829 München, Germany

CE-Symbol gemäß Richtlinie 93/68EWG

The CSSP-06W-140 is a splash-proof version of the SE-Series which is perfect for the installation in bathrooms, pool areas, e.g. The 6W powered speaker is equipped with a 100mm full-range loudspeaker and a 100V transformer with 3 power adjustments. The powder coated metal in RAL 9016 guarantees long-term stability.

The speaker is secured with protection class IP 54 against the risks of environmental influences. For additional reliability the speaker is impregnated against wetness. Fast and easy installation by WAGO 221 connector and strong spring clamps with protective caps for vibration damping. The connecting cables can be supplied by rubber grommets in the firedome.

Special paint of the speaker in 4-digit RAL- or NCS- colour available at extra cost. The firedome is included in the delivery.

This speaker is suitable for a ceiling strength of about 1 – 45 mm. Our specification is primarily related to solid ceilings, for ceilings with soft materials a higher ceiling thicknesses could be necessary. In addition, stronger cables and other fittings may also result in changes of the appropriate setup. With regard to the variety of materials and manufacturers, we recommend to build in a sample of the speaker to match the requirements accurately.


AUDEMO-SYSTEMS GmbH
Schatzbogen 62
81829 München, Germany

Tel.: +49 (0) 89 / 4 56 78 47-0
Fax: +49 (0) 89 / 4 56 78 47-2900
HRB 13910, Amtsgericht Regensburg

Status: 2022-05-09




Polar Diagrams

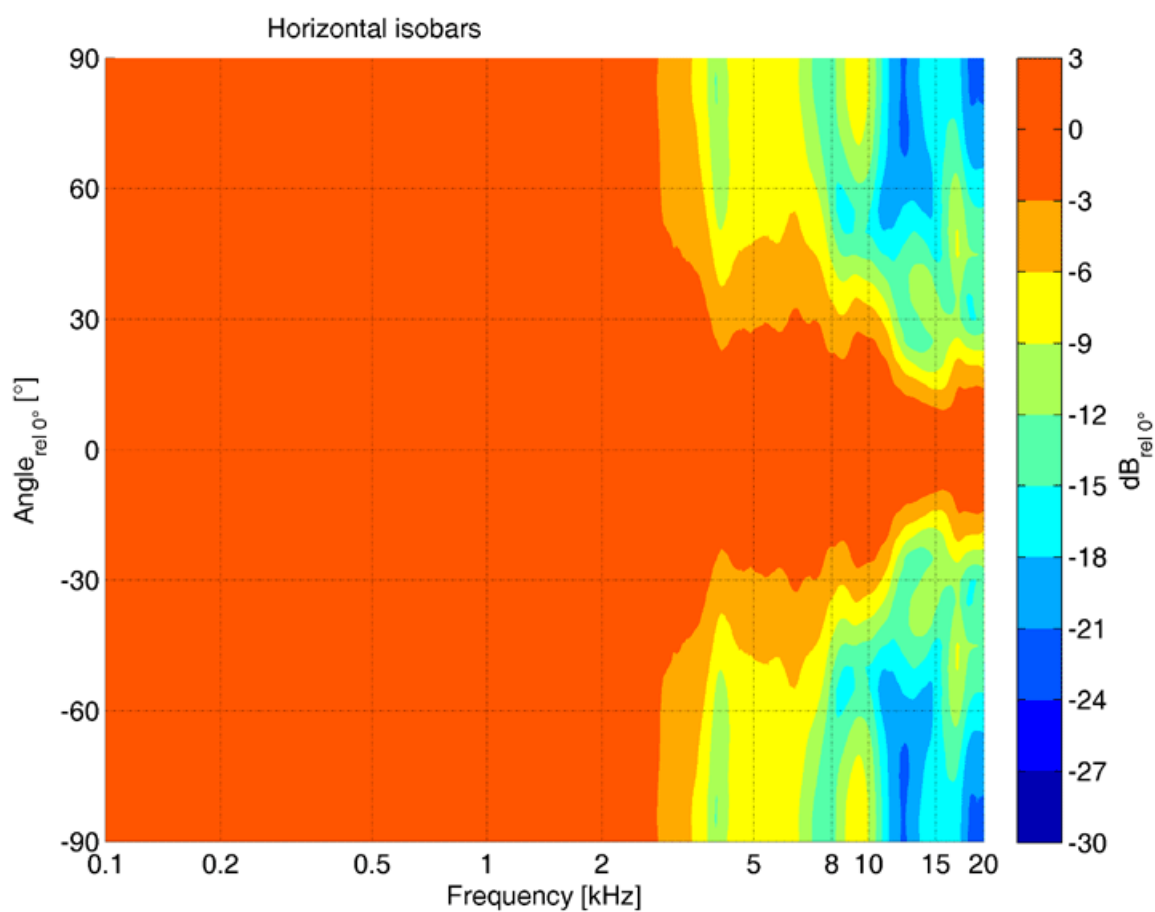




Frequency Response Diagrams

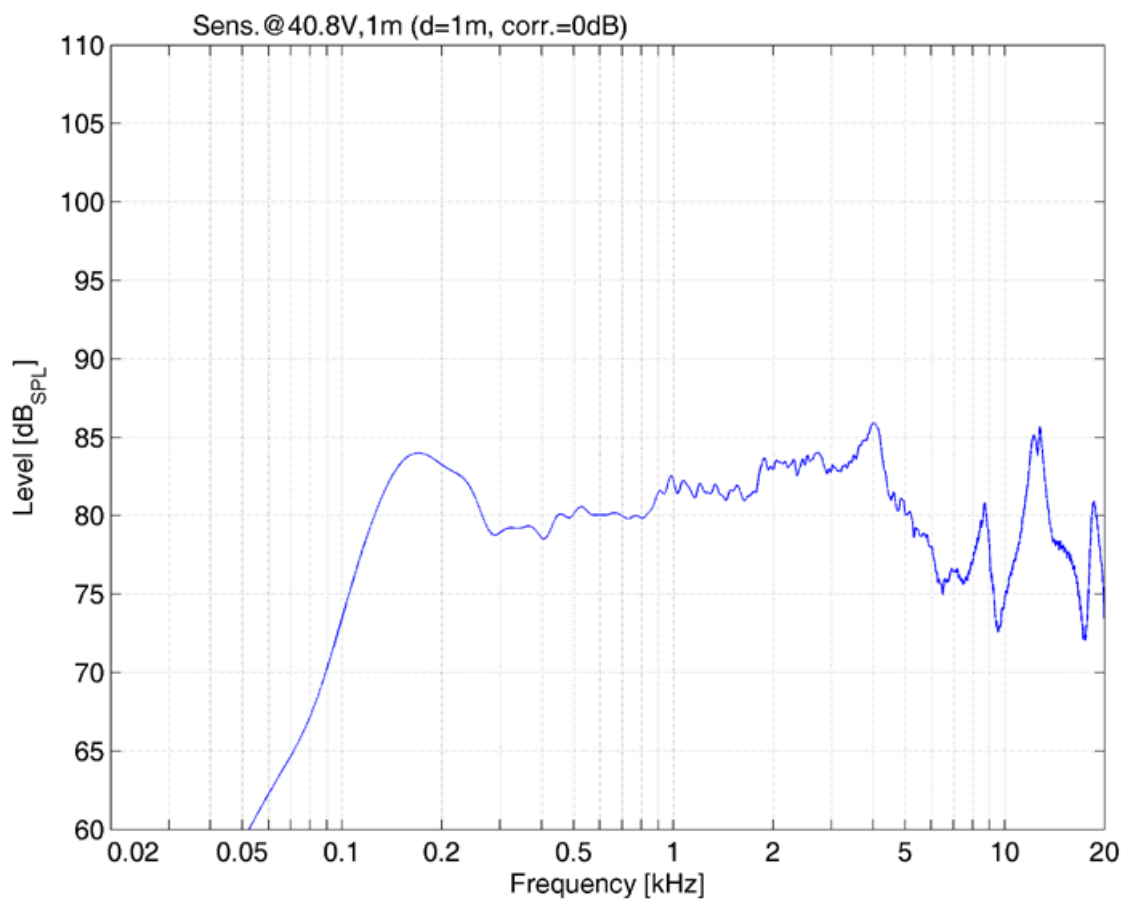

Technical Diagrams

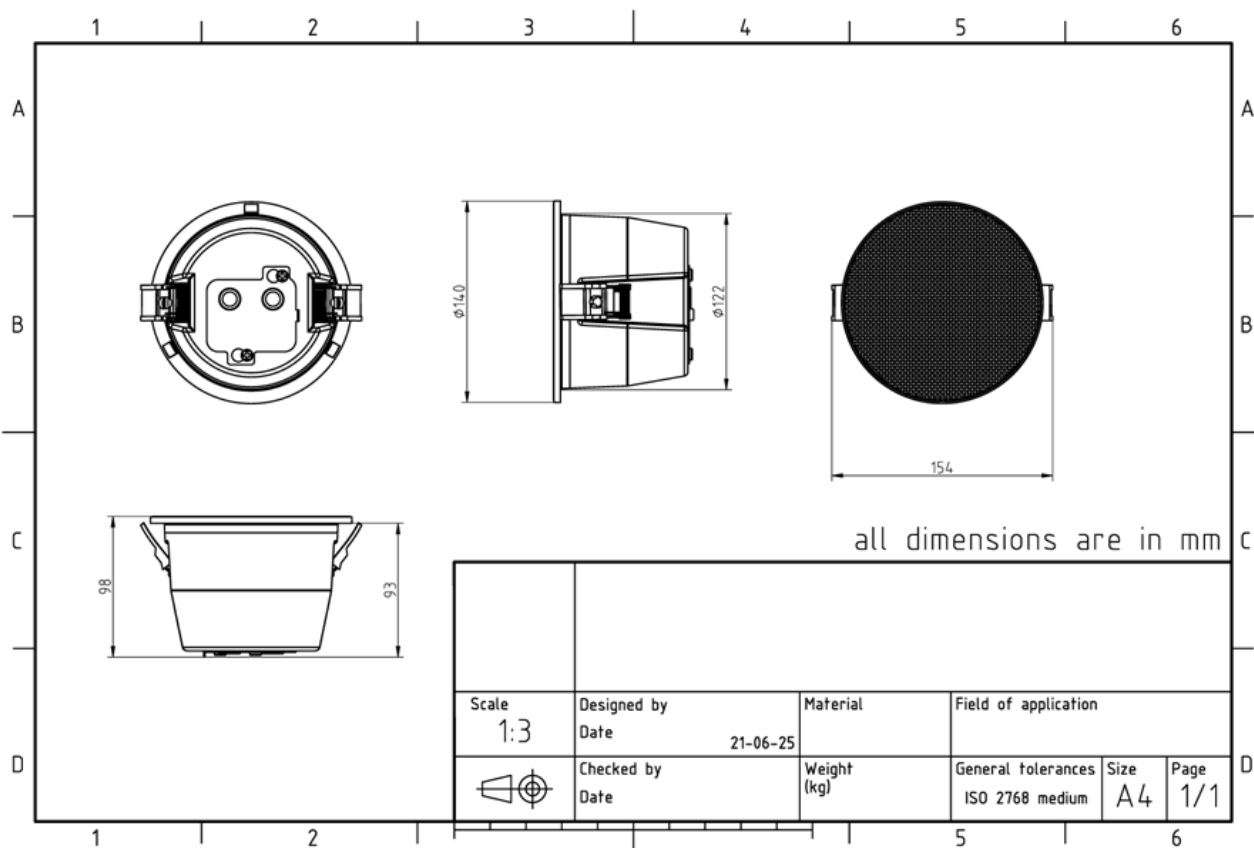



Technical Data (Electrical)

Description	CSSP-06W-140
Power	6/3/1,5 W
Impedance (100V)	1667/3333/6667 ohm
Frequency Range	98 - 20.000 Hz
Frequency Response	93 - 20.100 Hz
SPL 1W/1m, peak	84,7 dB
SPL , 1W/4m, peak	72,7 dB
SPL Pmax/4m, peak	79,1 dB
SPL, rated noise power / 4m	79,1 dB
Sensitivity EN54-24, 1W/4m	68,5 dB
Sensitivity EN54-24, 1W/1m	80,5 dB
Dispersion -6dB, 500Hz	h/v 180°
Dispersion -6dB, 1KHz	h/v 180°
Dispersion -6dB, 2KHz	h/v 180°
Dispersion -6dB, 4KHz	h/v 81°

Technical Data (Mechanical)

Dimensions	140x98 mm
IP Rating	IP54
Weight (net)	0,7 kg
Ceiling Cut-out	129 mm
Temperature range	-10 / +55 C°
Mounting	Quick fit mounting
Connector	WAGO 221 connector
Maximum cable cross section	4mm ²
Max. cable cross section loop	4mm ²
Colour	RAL 9016

All rights reserved.

Information contained in this document is believed to be accurate, however no representation or warranty is given and Audemo-systems in Germany assumes no liability with respect to the accuracy of such information.

AUDEMO-SYSTEMS GmbH
Schatzbogen 62
81829 München, Germany

Tel.: +49 (0) 89 / 4 56 78 47-0
Fax: +49 (0) 89 / 4 56 78 47-2900
HRB 13910, Amtsgericht Regensburg